



Solids



LEVEL INDICATOR

PFG57

Product Line: **Rotary**

Small-sized bladed level particularly suitable for use on small tanks or batching cells. Version with male thread G 1" 1/2.

ADVANTAGES

- An **EASY TO INSTALL** instrument that does not require any calibration, maintenance or specific tool for its installation.
- Thanks to the wide choice of paddles, all of which are interchangeable, it is **ADAPTABLE** to the different densities of the measured materials.
- Extremely **VERSATILE**, it can be installed on tanks, hoppers, on walls or roofs of silos, in a vertical, horizontal or oblique position.
- **CUSTOMIZABLE** with paddles, extensions, voltages.
- **DURABLE** and **RELIABLE** with aluminium casing, stainless steel shaft on ball bearings and electrical connection via anti-vibration faston terminals. Works with ambient temperatures from -20° to +70°C.

OPTIONS

- 
4 RPM: increase rotation speed, to reduce intervention times.

 **IECEx - ATEX**
DUST ZONE 20/21

 **European Union**
Conformity

 **Eurasian**
Conformity

 **United Kingdom**
Conformity

AVAILABLE VERSIONS



G 3/4

Version with a G 3/4 connection to process



1" 1/4 NPT


Version with a 1" 1/4 NPT connection to process

LEVEL INDICATOR PFG57



Solids

Product Line: **Rotary**

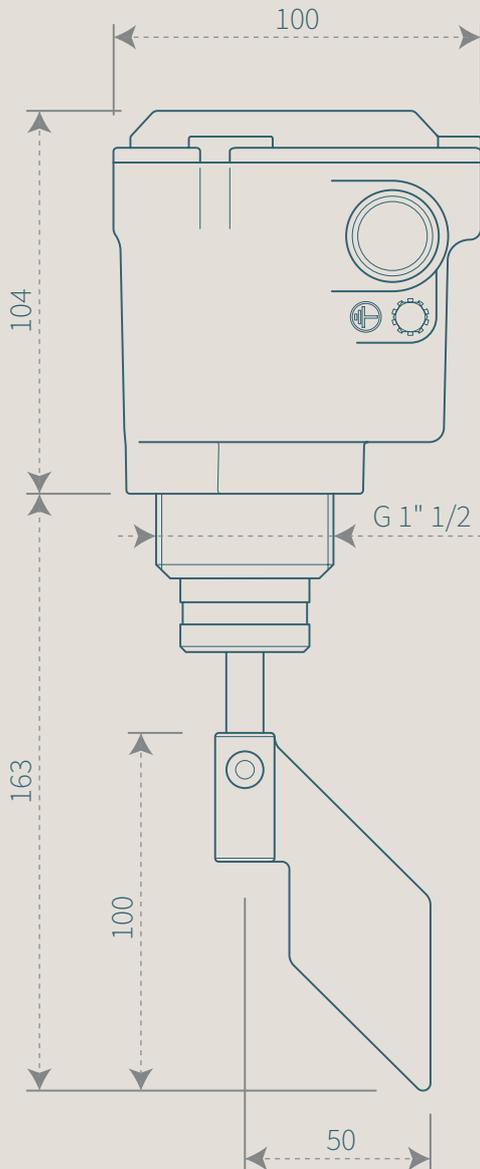

Customizations



115/230V AC



24/48V AC



24V DC



Lamp (only for
ATEX Zone 22)



4 RPM



Low
temperatures



Aluminium
flange



Iron sleeve
G 1 1/2
or G 3/4



Stainless steel
flange



Stainless steel
sleeve G 1 1/2
or G 3/4



Faston
terminals
(standard)



Screw
terminal blocks



Spring
terminal blocks



M12
Circular
connector

Extensions

In galvanized steel or stainless steel.

- With or without protection, up to **3000 mm**
- Adjustable, with additional holes **to alter the paddle position**
- Flexible, up to **12 meters**

Compatible paddles

For information on the range of available paddles, refer to the dedicated brochure.

