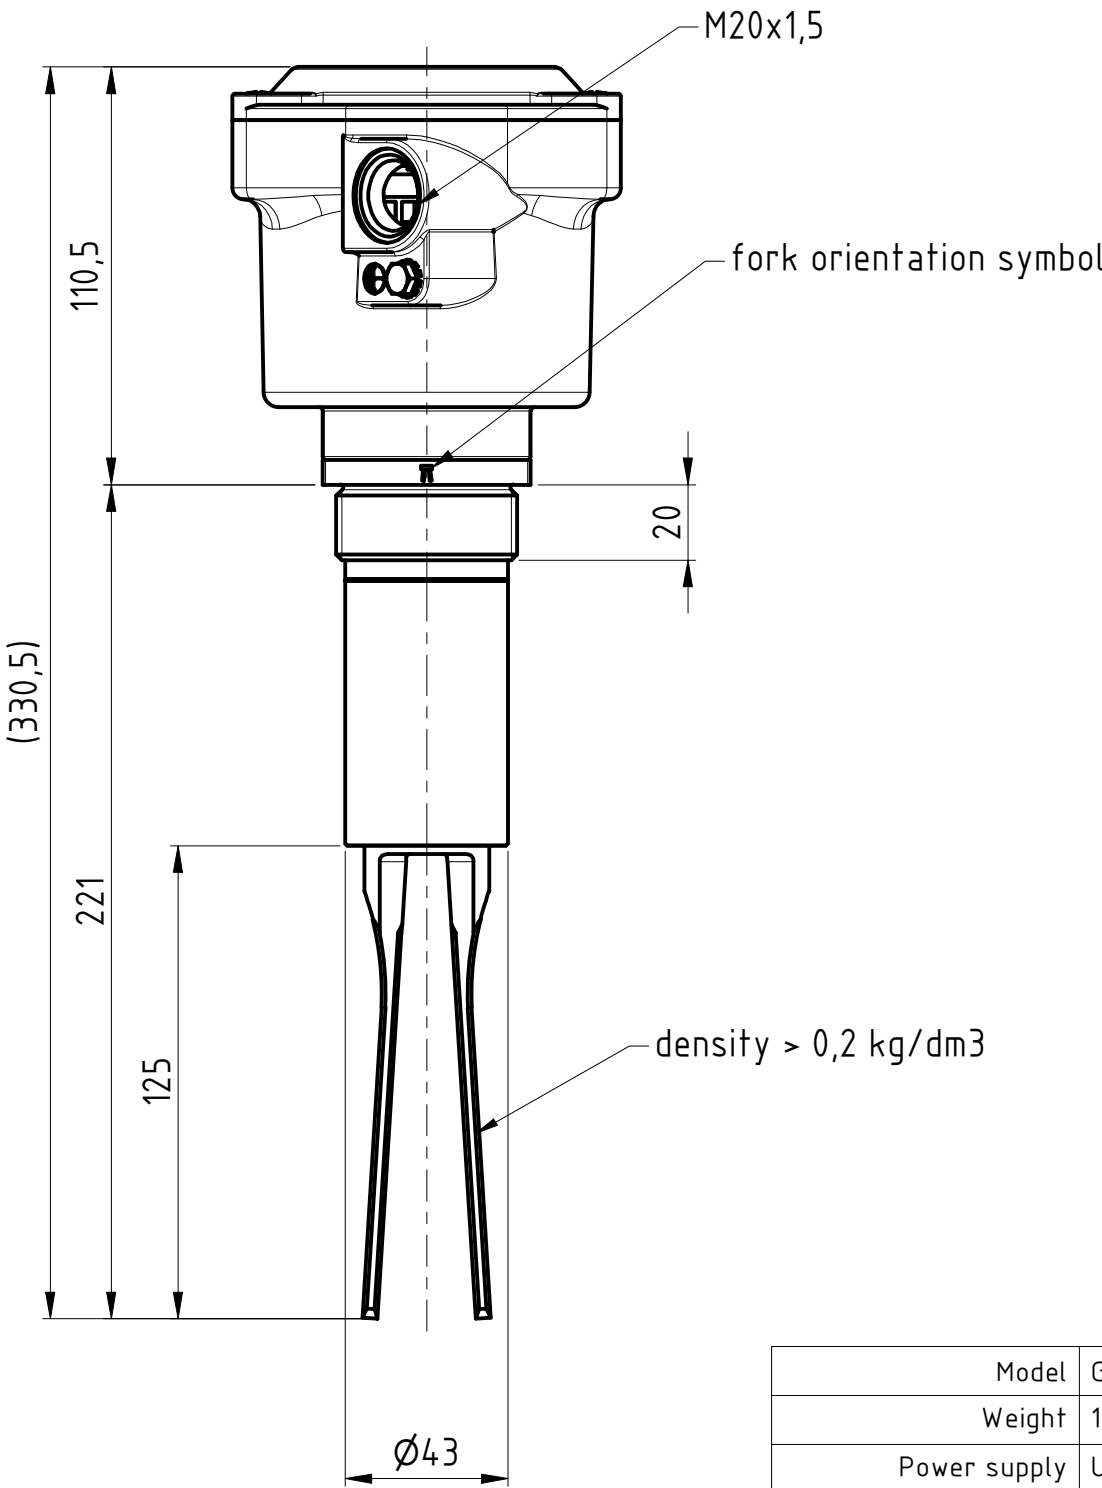
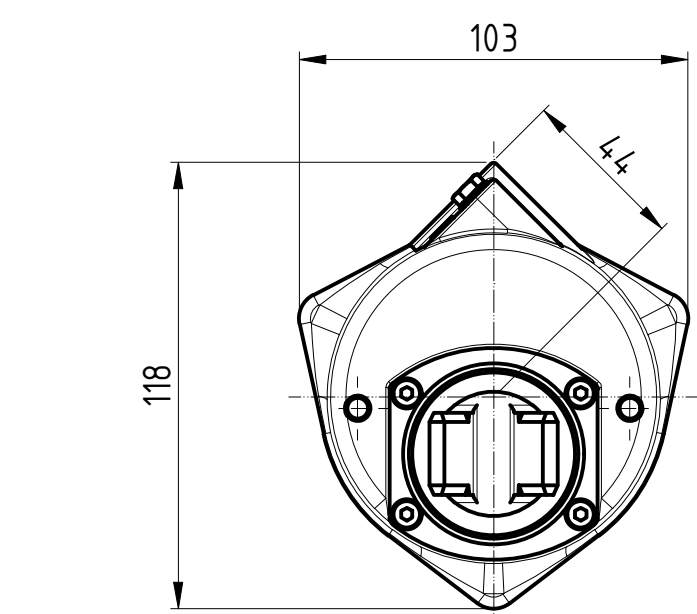


density > 0,2 kg/dm3




CONFIDENTIAL / PROPRIETARY
DO NOT DISTRIBUTE
® CAMLogic
- ALL RIGHTS RESERVED -

~ 15 to 260 V (AC)
--- 15 to 80 V (DC)

⊕	⊖	⊥	MAX. 5A / 250V			MAX. 5A / 250V		
L1	N	PE	NC	COM	NO	NC	COM	NO
1	2	3	4	5	6	7	8	9
POWER SUPPLY			SIGNAL 1			SIGNAL 2		

Terminals with screw terminal design (flat head)
0,05 - 2,5mm2 (AWG30 - AWG12)

Model	GVS25		
Weight	1,6 Kg		
Power supply	Universal power supply 15 to 80 VDC & 15 to 260 VAC		
Signal	DPDT		
IP grade	IP65		
Housing	Aluminium		
Wetted parts	AISI316L		
Connection	G 1" 1/2 AISI316L		
Ambient temperature	-20 < Ta < +70 [°C]		
Process temperature	-20 < Tp < +70 [°C]		
Pressure range	+0,8 ... +20 bar [abs]		
Directives	2011/65/EU (RoHS)		
	2014/30/EU (EMC)		
	2014/35/EU (LVD)		
ATEX Marking	-		
IECEX Marking	-		
® CAMLogic Via Dell'Industria 12 42025 Cavriago (RE) - ITALY Web: www.camlogic.it	DRAWING NUMBER 0602_0041_00		
	DRAWN: Guidetti F.		15/01/2025
SCALE: 1 : 2	DESCRIPTION GVS25		REV:
GENERAL TOL: ISO 2768-mH			SHEET: 1
FILE: 0602_0041_00-00.idw	DRAWING FROM CAD SYSTEM - REFER TO 3D MODEL FOR MISSING DIMENSION - NO MANUAL MODIFICATION ALLOWED		SHEET NO: 1 OF 3

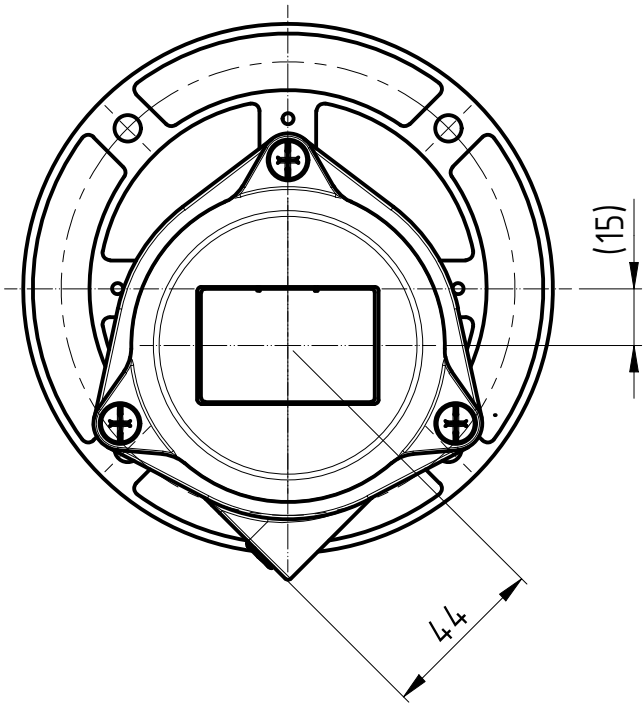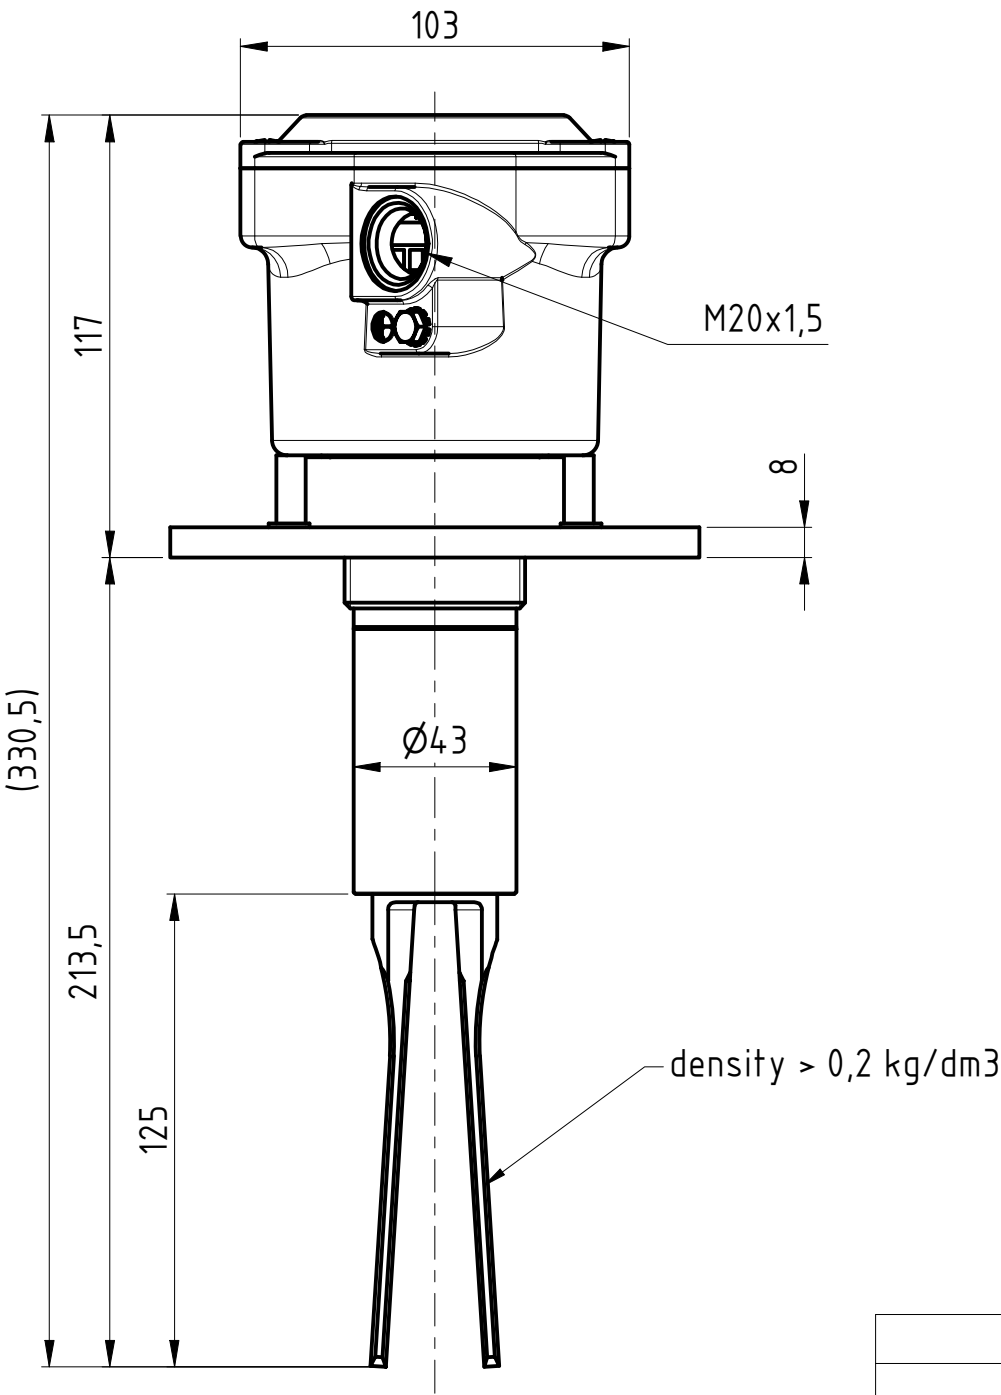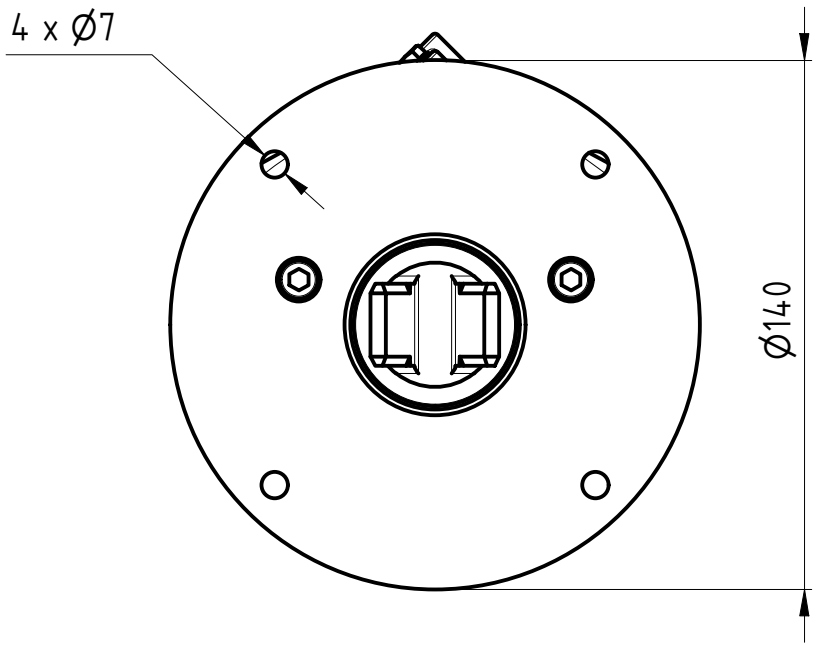


CONFIDENTIAL / PROPRIETARY
DO NOT DISTRIBUTE

® CAMLogic
- ALL RIGHTS RESERVED -

~ 15 to 260 V (AC)
--- 15 to 80 V (DC)

			MAX. 5A / 250V 			MAX. 5A / 250V 		
L1	N	PE	NC	COM	NO	NC	COM	NO
1	2	3	4	5	6	7	8	9
POWER SUPPLY			SIGNAL 1			SIGNAL 2		

Terminals with screw terminal design (flat head)
0,05 - 2,5mm² (AWG30 - AWG12)

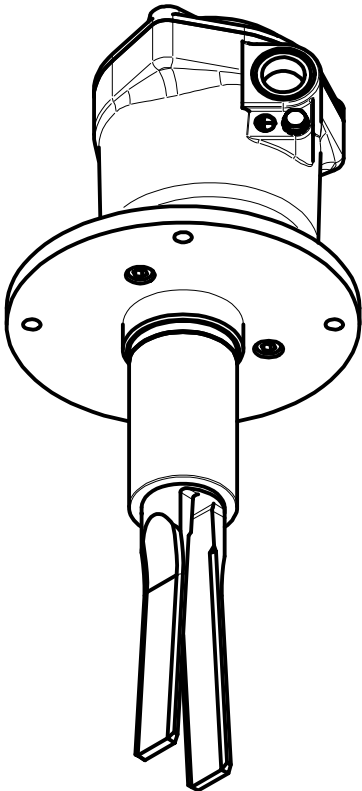


Model	GVS25	
Weight	1,6 Kg	
Power supply	Universal power supply 15 to 80 VDC & 15 to 260 VAC	
Signal	DPDT	
IP grade	IP65	
Housing	Aluminium	
Connection	Aluminium Flange	
Wetted parts	AISI316L	
Ambient temperature	-20 < Ta < +70 [°C]	
Process temperature	-20 < Tp < +70 [°C]	
Pressure range	+0,8 ... +20 bar [abs]	
Directives	2011/65/EU (RoHS)	
	2014/30/EU (EMC)	
	2014/35/EU (LVD)	
ATEX Marking	-	
IECEx Marking	-	

® CAMLogic Via Dell'Industria 12 42025 Cavriago (RE) - ITALY Web: www.camlogic.it	CAMLogic®	DRAWING NUMBER	
		0602_0041_00	
SCALE: 1 : 2	DESCRIPTION	DRAWN: Guidetti F.	15/01/2025
GENERAL TOL: ISO 2768-mH			REV:
	GVS25		SHEET: 2
FILE: 0602_0041_00-00.idw	DRAWING FROM CAD SYSTEM - REFER TO 3D MODEL FOR MISSING DIMENSION - NO MANUAL MODIFICATION ALLOWED	UNLESS OTHERWISE SPECIFIED - DIMENSIONS ARE IN mm -	SHEET NO: 2 OF 3

SIZE UNI A3

Extension without flange

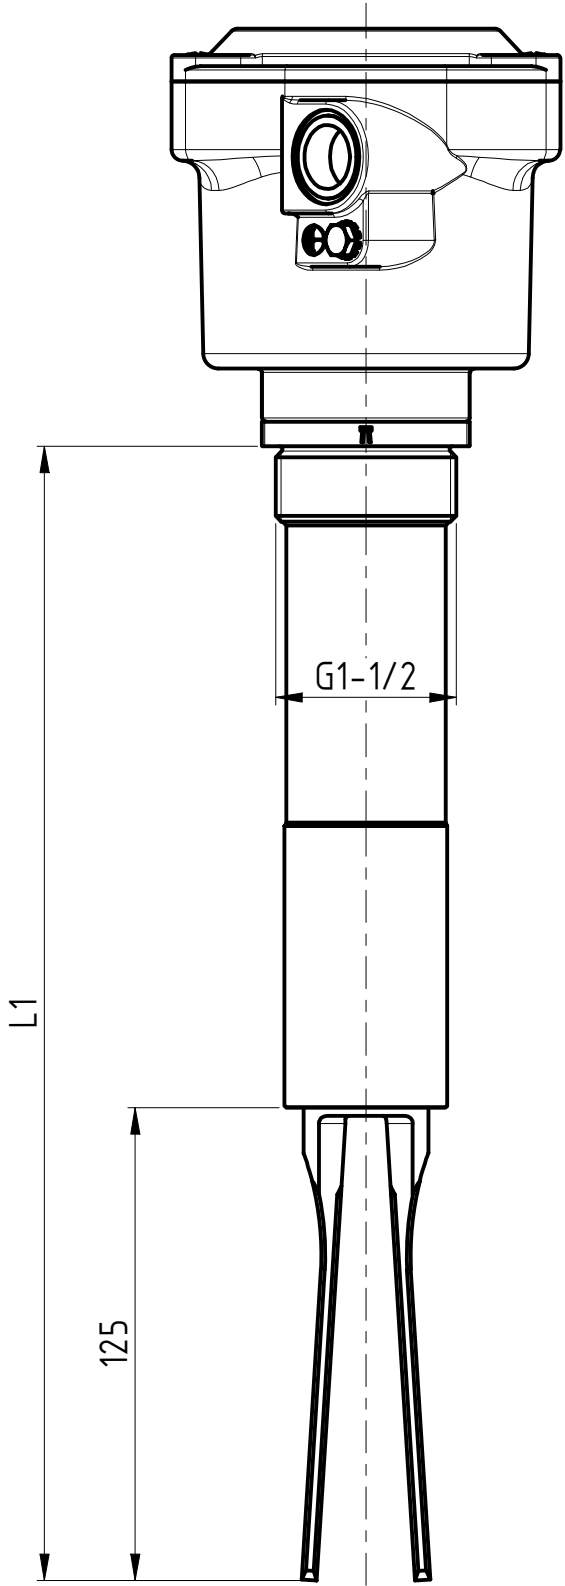

Extension with flange

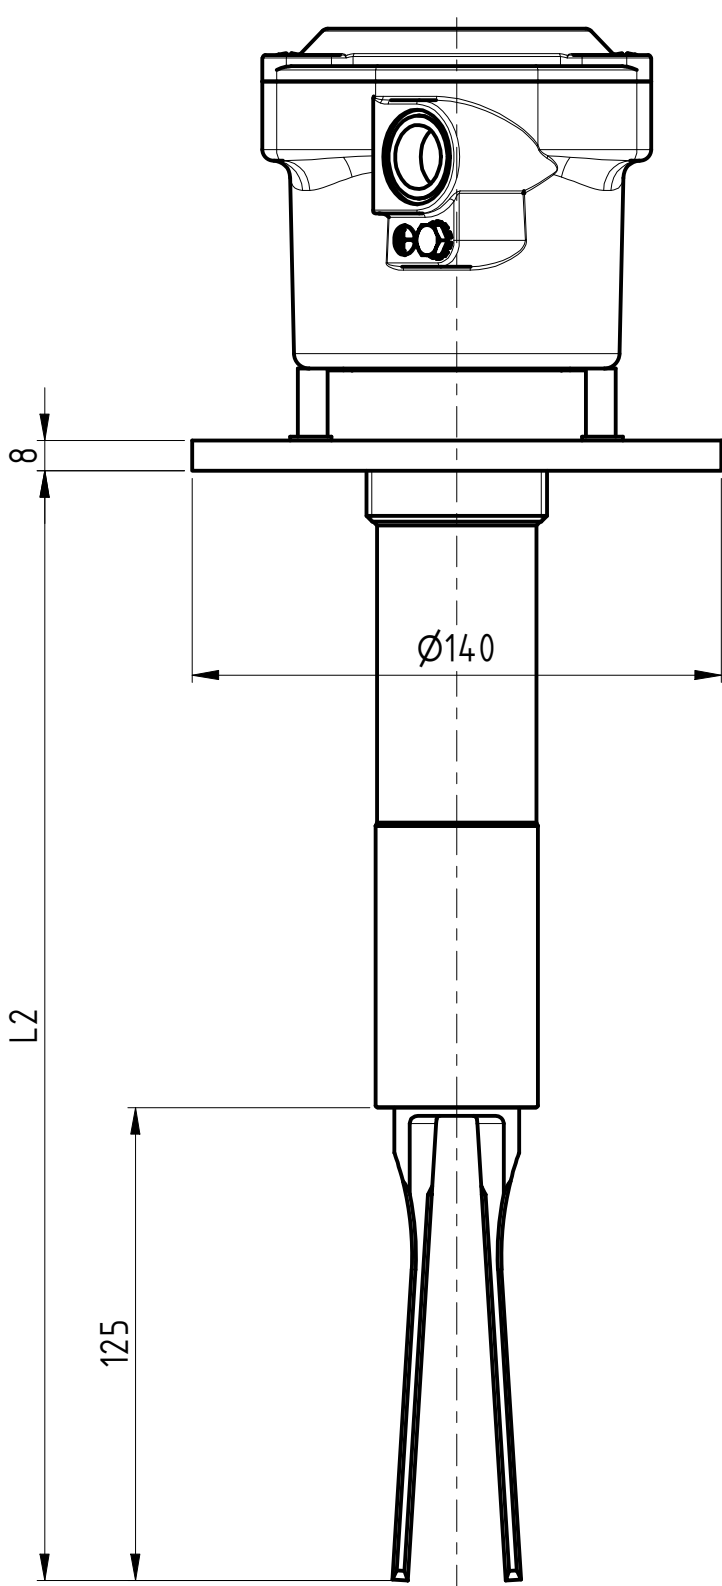


TABELLA	
L1 (mm)	L2 (mm)
300	294
400	394
500	494
600	594
700	694
800	794
900	894
1000	994
1500	1494
2000	1994
2500	2494
3000	2994

