
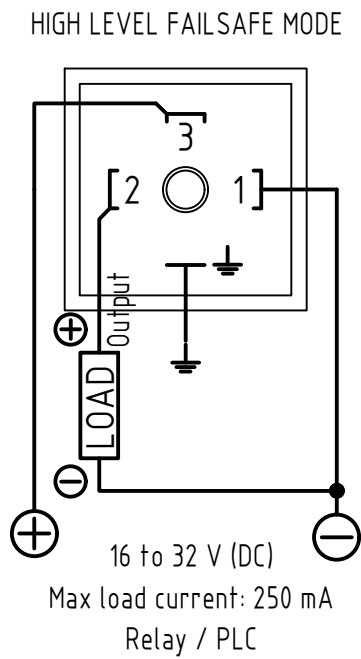
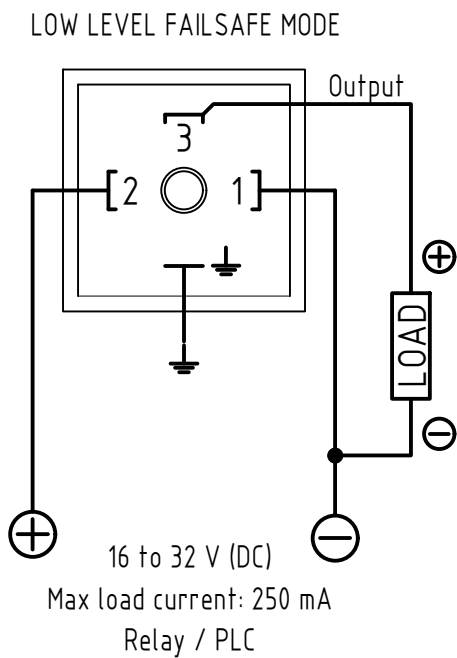
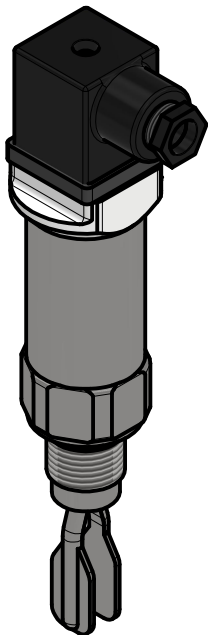


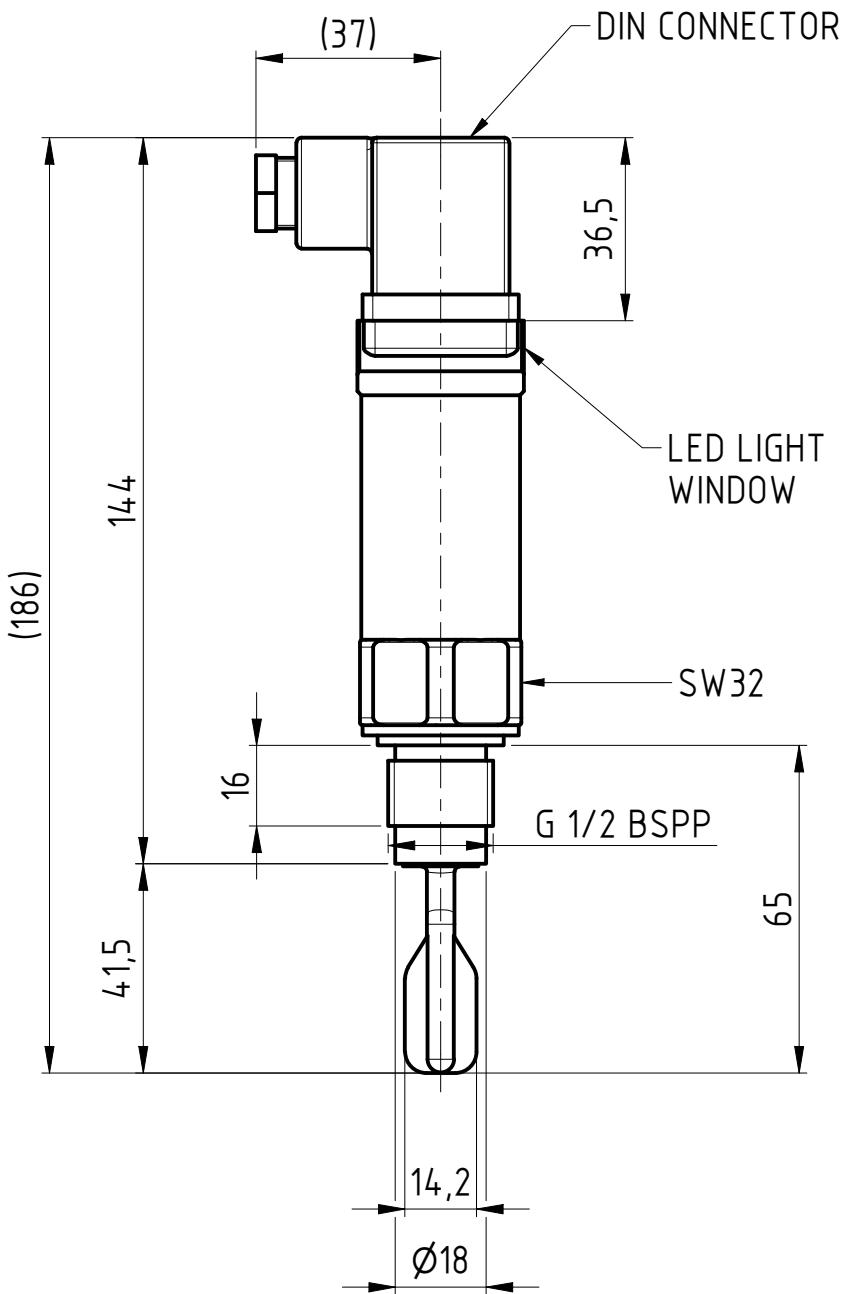

Model	GVL1C		
Weight	0,32 Kg		
Power supply	Universal power supply 16 to 32V DC		
Signal	PNP		
IP grade	IP65		
Housing	AISI316L		
Connection	AISI316L		
Wetted parts	AISI316L		
Ambient temperature	-20 < Ta < +70 [°C]		
Process temperature	-30 < Tp < +150 [°C]		
Pressure max	15 bar [abs]		
Directives	2011/65/EU (RoHS)		
	2014/30/EU (EMC)		
	2014/35/EU (LVD)		
ATEX Marking	-		
IECEX Marking	-		

® CAMLogic Via Dell'Industria 12 42025 Cavriago (RE) - ITALY Web: www.camlogic.it	CAMLogic®	DRAWING NUMBER	
		0602_0043_00	
SCALE: 1 : 1.5	DESCRIPTION	DRAWN: Guidetti F.	17/03/2025
GENERAL TOL: ISO 2768-mH			REV:
	GVL1C		SHEET: 1
FILE: 0602_0043_00-00.idw	DRAWING FROM CAD SYSTEM - REFER TO 3D MODEL FOR MISSING DIMENSION - NO MANUAL MODIFICATION ALLOWED	UNLESS OTHERWISE SPECIFIED - DIMENSIONS ARE IN mm -	SHEET NO: 1 OF 1